

Enterprise Switch

AS4630-54TE



The Edgecore EPS201 is a high-performance Gigabit Ethernet Layer 3 switch featuring 54 ports; the EPS201 has 48 10/100/1000BASE-T ports, 4 x 25G SFP28 uplink ports, and 2 x 100G QSFP28 stacking ports (stacking capability subject to NOS implementations).

The EPS201 is ideal as a data center top-of-rack, enterprise, or campus switch, it includes redundant hot-swappable AC PSUs and port-to-power or power-to-port airflow.

Key Features and Benefits


- Cost-effective, open network infrastructure for data center racks or for enterprise environment.
- 1 GbE connections to server and storage nodes in rack, with 25 GbE uplinks to spine network.
- 48 x 100/1000BASE-T RJ-45 ports.
- 4 x SFP+ uplink ports, supporting 25 GbE.
- Full line-rate L2 or L3 forwarding and switching.
- Hot-swappable, load-sharing, redundant AC PSUs.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE) for automated loading of compatible open source and commercial NOS offerings.
- Compatible with Open Network Linux (ONL), the open-source, OCP reference NOS.



Software Supported



Interfaces

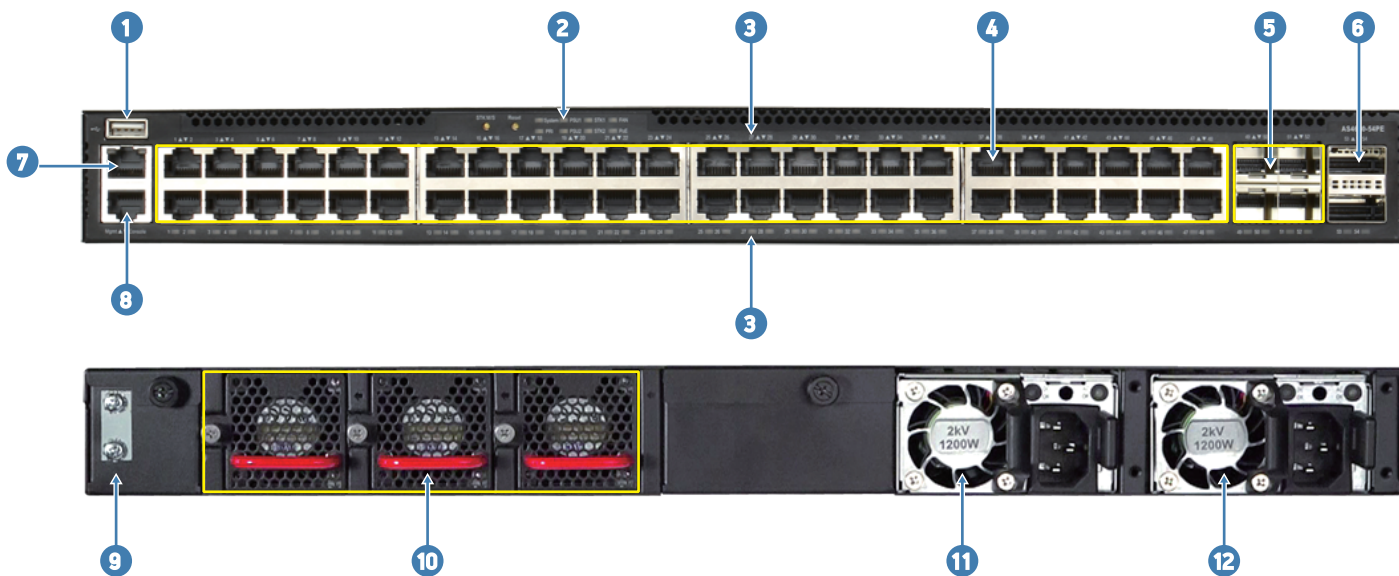

Description

- | | |
|--------------------------|--|
| 1. USB storage port | 7. Management port |
| 2. System LEDs | 8. Console port |
| 3. Port indicators | 9. Grounding point |
| 4. 48 x 1G RJ-45 ports | 10. Hot-swappable 2 + 1 redundant fans |
| 5. 25G SFP28 ports | 11. PSU 2 |
| 6. QSFP28 stacking ports | 12. PSU 1 |

Ports

- Switch Ports:
 - 48 x RJ-45 100/1000BASE-T ports
 - 4 x 25G SFP28 uplink ports
 - 2 x 100G QSFP28 stacking ports (requires NOS to support hardware stacking feature)
- Note: When a DAC cable is used in a topology, a link issue may be encountered if the CR4 Auto-Negotiation/Link Training does not turn on. This can be solved by manually enabling CR4 Auto Negotiation/Link Training.
- Management Ports:
 - 1 x RJ-45 serial console
 - 1 x RJ-45 100/1000BASE-T management port
 - 1 x Type-A USB storage port

Key Components

- Switch Silicon: Broadcom BCM56371 Trident III 480 Gpbs
- CPU: Intel Atom/Denverton C3558 4-cores 2.2 GHz x86 processor
- DDR4: 8 GB x 2 SO-DIMM
- SPI Flash: 16 MB x 2
- m.2 SSD: 32 GB MLC

Performance

- Switching Capacity: 960 Gpbs full duplex
- Forwarding Rate: 744 Mpps
- MAC Addresses: 16K min./112K max.
- VLAN IDs: 4K
- Jumbo Frames: Up to 12,288 bytes
- Packet Buffer Size: 8 MB Integrated packet buffer memory

LEDs

- GE RJ-45 SFP+ Port LEDs: Link Status, Activity
- SFP28 Port LEDs: Port LEDs: Link Speed, Link Status, Activity
- Ethernet Management Port LED: Link Status, Activity
- System LEDs: PRI, PSU1, PSU2, STK1, STK2, FAN

Physical and Environmental

- Dimensions (HxWxD): 43.8 x 47.4 x 4.4 cm (17.24 x 18.66 x 1.73 in)
- Weight: 6.98 kg (15.39 lb), with two installed PSUs
- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 5% to 95% non-condensing

Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with Open Network Linux (ONL), the open-source, OCP reference NOS.

Power

- PSUs: 2 redundant, load-sharing, hot-swappable AC
- Input Voltage: 100 to 240 VAC at 50-60 Hz
- Power Consumption: 150 Watts maximum

Regulatory

- EN 55032:2015+AC:2016, Class A
- EN 61000-3-2:2014, Class A
- EN 61000-3-3:2013
- FCC Class A
- VCCI Class A
- CCC GB 9254-2008, Class A
- BSMI Class A, CNS 13438
- IEC 61000-4-2/3/4/5/6/8/11
- EN 55024:2010+A1:2015
- EN 55035:2017
- UL (UL 62368-1 @ CSA C22.2 No. 62368-1)
- CB (IEC/EN 60950-1, IEC/EN 62368-1)
- CCC GB4943.1-2011
- BSMI, CNS 14336-1

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2021 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

Ordering Information

Base model: AS4630-54TE; Intel® Atom® processor C3558; 48 - 1G + 4 - 25G SFP28 + 2 - 100G QSFP28 with ONIE software Installer.

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS4630-54TE-O-AC-F-US	F0PZZ4654410A	Dual AC PSUs	port-to-power airflow	N. America
AS4630-54TE-O-AC-B-US	F0PZZ4654411A	Dual AC PSUs	power-to-port airflow	N. America
AS4630-54TE-O-AC-F-EU	F0PZZ4654208A	Dual AC PSUs	port-to-power airflow	EU
AS4630-54TE-O-AC-B-EU	F0PZZ4654209A	Dual AC PSUs	power-to-port airflow	EU
AS4630-54TE-O-AC-F-UK	F0PZZ4654308A	Dual AC PSUs	port-to-power airflow	UK
AS4630-54TE-O-AC-B-UK	F0PZZ4654309A	Dual AC PSUs	power-to-port airflow	UK
AS4630-54TE-O-AC-F-JP	F0PZZ4654508A	Dual AC PSUs	port-to-power airflow	JP
AS4630-54TE-O-AC-B-JP	F0PZZ4654509A	Dual AC PSUs	power-to-port airflow	JP
YM-1151D A03R	F0TEC4654000A	150 W AC Power Supply FRU	port-to-power airflow	
YM-1151D A02R	F0TEC4654000Z	150 W AC Power Supply FRU	power-to-port airflow	
FAN-1U-1x1M-F	F0TZZ4654009A	FAN Module	port-to-power airflow	
FAN-1U-1x1M-B	F0TZZ4654010A	FAN Module	power-to-port airflow	
Model Number	Part Number	Description		
4630-54TE-SVC-RTF	REWEC4630001Z	AS4630-54TE, Annual Hardware Service, Return-to-Factory, after warranty. 3 year warranty included already with the product, maximum 2 additional years per product. FAN and PSU are excluded.		