### AS4610-30T



### Enterprise Switch AS4610-30T



The Edgecore AS4610-30T is a high-performance Gigabit Ethernet Layer 3 switch featuring 30 ports; with 24 10/100/1000BASE-T ports, 4 x 10G SFP+ uplink ports, and 2 x 20G QSFP+ stacking ports (stacking capability subject to NOS implementations). The AS4610-30T is ideal for enterprise or campus networks deploying open network solutions, it includes redundant hot-swappable AC PSUs and port-to-power airflow. This open network switch is loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible Network Operating System software, including the open source options, plus commercial NOS offerings.

### **Key Features and Benefits**

- Cost-effective, open network switch for enterprise, campus and data center fabric.
- 1 GbE connections to server and storage nodes in rack, with 10 GbE uplinks to spine network.
- 24 x 10/100/1000BASE-T RJ-45 ports.
- 4 x SFP+ uplink ports, supporting 10 GbE (DAC, 10GBASE-SR/LR/ER/LRM) or 1 GbE (1000BASE-T/SX/LX).
- Full line-rate L2 or L3 forwarding and switching.
- Hot-swappable, load-sharing, redundant AC PSUs.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE) for automated loading of compatible open source and commerical NOS offerings.














Greater control Rapid innovation Reduced CAPEX and OPEX



### **Free Software Included**

## onie

### Interfaces

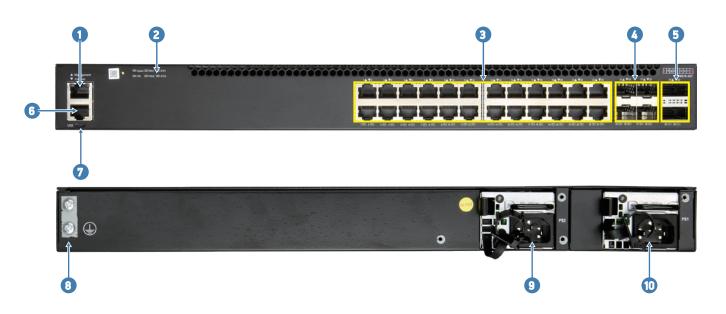

Description						
1.	RJ-45 management port	6.	RJ-45 console port			
2.	System LEDs	7.	USB storage port			
3.	24 x 1G RJ-45 Ports	8.	Grounding point			
4.	4 x 10G SFP Ports	9.	PSU 2			
5.	2 x QSFP+ stacking ports	10.	PSU 1			

## AS4610-30T

## **Enterprise Switch**



#### Ports

- Switch Ports:
  - 24 x RJ-45 100/1000BASE-T ports
  - 4 x 10G SFP+ ports supporting 10G or 1G
  - 2 x 20G QSFP+ stacking port (requires NOS to support hardware stacking feature)
- Management Ports:
  - (1) port-to-power airflow type
    - 1 x Micro USB serial console
    - 1 x RJ-45 100/1000BASE-T management port
    - 1 x Type-A USB storage port
  - (2) port-to-power airflow v1 type
    - 1 x RJ-45 serial console
    - 1 x RJ-45 100/1000BASE-T management port
    - 1 x Micro-USB storage port

#### **Key Components**

- Switch Silicon: Broadcom BCM56342 Helix4
- CPU: Dual-core ARM Cortex A9 1 GHz
- Memory: 2 GB DDR3 SDRAM ECC
- Flash: 8 MB SPI Flash, 32GB MLC eUSB

#### Performance

- Wire Speed Forwarding: L2 and L3
- Switching Capacity: 208 Gbps full duplex
- Forwarding Rate: 156 Mpps
- MAC Addresses: up to 96 K
- VLAN IDs: 4K
- Jumbo Frames: Up to 12 KB
- L3 Entry: IPv4/IPv6 96 k/48 k Unicast, 48 k/24 k Multicast
- Packet Buffer Size: 4 MB shared buffer pool

#### **Supported Optics and Cables**

- GE RJ-45 Ports: Cat 5/5e/6 up to 100 m
- SFP+ Ports:
  10GBASE-CR DAC; 0.5 m to 7 m
  10GBASE-SRL/SR; up to 100/300 m over OM3 MMF
  10GBASE-LR; up to 10 km over SMF
  1000BASE-SX, 1000BASE-LX, 100/1000BASE-T
- QSFP+ Ports for stacking

#### LEDs

- GE RJ-45 SFP+ Port LEDs: Link Speed, Link Status, Activity
- 10G SFP+ Port LEDs: Link Speed, Link Status, Activity
- Ethernet Management Port LED: Link Status, Activity
- System LEDs: PRI, PSU1, PSU2, STK1, STK2, FAN

#### Physical and Environmental

- Dimensions (WxDxH): 44 x 35 x 4.4 cm (17.32 x 13.78 x 1.77") 1 RU
- Weight: 5.16 kg (11.37 lb)
- Operating Temperature: 0°C to 45°C
- Storage Temperature: -40°C to 70°C
- Operating Humidity: 5% to 95% non-condensing

#### Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with the following NOS options: open source options, plus commercial NOS offerings.

#### Power

- PSUs: 2 redundant, load-sharing, hot-swappable AC
- Input Voltage: 100-240 VAC, 50-60 Hz. 3-1.5 A

#### Regulatory

- EMI: CE Mark (EN55022 Class A) FCC Part 15 Class A VCCI Class A BSMI (CNS13438)
- Environmental: Temperature: IEC 68-2-14 Shock: IEC 68-2-29
- Vibration: IEC 68-2-29 Drop: ISTA 2A
- RoHS-6 Compliant
- Safety: UL (CSA 22.2 No 60950-1 & UL 60950-1) CB (IEC/EN60950-1) BSMI (CNS14336)
- Country of Origin: Taiwan (TAA Compliant)

#### Warranty

Please check www.edge-core.com for the warranty terms in your country.

#### For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

#### About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2021 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.



### **Ordering Information**

# Base Model: AS4610-30T; ARM Cortex processor; 24-port BASE-T + 4-port 10G uplink with 2-port stacking port; ONIE software installer.

onne soltware instatter.								
Model Number	Part Number	PSU	Airflow	Region (power cord)				
4610-30T-0-AC-F-US v1	F0PEC4630403Z	dual AC PSUs	port-to-power airflow	N. America				
4610-30T-O-AC-F-EU v1	F0PEC4630203Z	dual AC PSUs	port-to-power airflow	Europe				
4610-30T-0-AC-F-UK v1	F0PEC4630303Z	dual AC PSUs	port-to-power airflow	UK				
4610-30T-0-AC-F-JP v1	F0PEC4630503Z	dual AC PSUs	port-to-power airflow	JP				
Model Number	Part Number	Description						
4610-XXX-SVC-RTF	REWECECWA001Z	AS4610 series, Annual Hardware Service, Return-to-Factory, after warranty. 3 year warranty included already with the product, maximum 2 additional years per product. FAN and PSU are excluded.						
RKIT-85-4610	F00EC4630000Z	Rack mount kit (for AS4610-54P/ AS4610-54T/ AS4610-30P/ AS4610-30T )						